


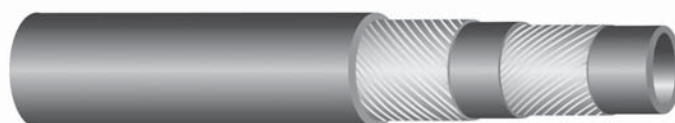

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1447165	6	17/72	14	0,55	3,4	51	13,6	204	0,19	0,13	45	1,8	100	328
1447173	8	5/16	16	0,63	3,4	51	13,6	204	0,22	0,15	55	2,2	100	328
1447181	10	25/64	19	0,75	3,4	51	13,6	204	0,30	0,20	65	2,6	60	200
1447190	12	15/32	21	0,83	2,5	38	10	150	0,34	0,23	75	3,0	60	200
1447203	13	1/2	22	0,87	2,5	38	10	150	0,36	0,24	80	3,2	60	200
1447149	15	19/32	24	0,95	2,5	38	10	150	0,40	0,27	90	3,5	60	200
1447157	16	5/8	25	0,99	2,5	38	10	150	0,42	0,28	100	3,9	60	200
1447211	18	23/32	27	1,06	2,5	38	10	150	0,46	0,31	105	4,1	40	131
1447220	19	3/4	28	1,10	2,5	38	10	150	0,48	0,32	110	4,3	40	131


**IT**

**Norme:** tubi conformi alle norme:- ISO 7840:04 A1 e direttiva europea 94/25 CE con certificazione RINA Dip. 106705/VE/9 - SAEJ 1527 USCG type A1.

**Applicazione:** tubo per imbarcazioni da diporto (fino 24 m) per passaggio di benzina o gasolio, a bassa pressione nei motori entro bordo. Resistente al fuoco in copertura.

**Temperatura:** da -20 °C a +100 °C.

**Costruzione**

**Sottostrato:** nero, liscio in gomma sintetica, resistente ad olii e carburanti con contenuto di aromatici fino al 50%.

**Rinforzo:** inserti tessili ad alta tenacità.

**Copertura:** nera, liscia in gomma sintetica, resistente al fuoco, al calore, ai carburanti, ai grassi e agli agenti atmosferici.

**Marcatura:** IVG POSEIDON/EXTR. ANNO PROD. - ISO 7840:04-A1 CE DIP 106705/VE/9 RINA SAEJ 1527 USCG TYPE A1 - SIZE.

**EN**

**Standards:** - ISO 7840:04 A1 and European Directive 94/25 CE with RINA certification Dip. 106705/VE/9 - SAEJ 1527 USCG type A1.

**Application:** hose suitable for conveying petrol and diesel oil at low pressure, fire resistant for small craft (up to 24 m) with permanently installed inboard engines.

**Temperature:** from -20 °C (-4 °F) to +100 °C (+212 °F).

**Construction**

**Tube:** black, seamless synthetic rubber compound, resistant to oils and fuels, whit aromatic content up to 50%.

**Reinforcement:** high strength synthetic fabrics.

**Cover:** black, fire resistant, seamless synthetic rubber compound, resistant to ageing, greases, weather and heat.

**Branding:** IVG POSEIDON/EXTR. ANNO PROD. - ISO 7840:04-A1 CE DIP 106705/VE/9 RINA SAEJ 1527 USCG TYPE A1 - SIZE.

