


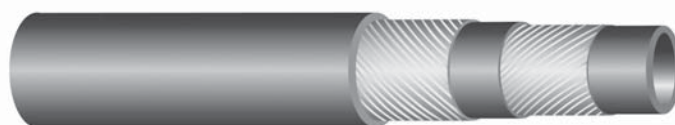

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1445260	10	25/64	20	0,79	20	300	60	900	0,26	0,17	80	3,2	60	200
1445278	13	1/2	23	0,91	20	300	60	900	0,32	0,22	105	4,1	60	200
1446223	15	19/32	25	0,99	20	300	60	900	0,40	0,27	120	4,7	60	200
1445294	19	3/4	30	1,18	20	300	60	900	0,47	0,32	150	5,9	60	200
1446258	25	1	35	1,38	20	300	60	900	0,60	0,40	200	7,9	40	131


IT

Applicazione: tubo particolarmente flessibile e versatile, adatto per convogliare aria, acqua calda e prodotti chimici con media aggressività.
Temperatura: da -40 °C a +120 °C.

Costruzione

Sottostrato: nero, liscio in gomma EPDM antistatica.

Rinforzo: inserti tessili ad alta tenacità.

Copertura: gialla, liscia in gomma EPDM resistente al calore e agenti atmosferici.

Marcatura: IVG RUBBER HOSE MULTIFORM YELLOW 20 BAR W.P. SIZE - BATCH NUMBER.

EN

Application: multipurpose hose suitable to convey air, hot water and non aggressive chemicals.

Temperature: from -40 °C (-40 °F) to +120 °C (+248 °F).

Construction

Tube: black, seamless special EPDM antistatic rubber compound.

Reinforcement: high strength synthetic fabrics.

Cover: yellow, seamless, EPDM rubber compound, heat and weather-resistant.

Branding: IVG RUBBER HOSE MULTIFORM YELLOW 20 BAR W.P. SIZE - BATCH NUMBER.

