


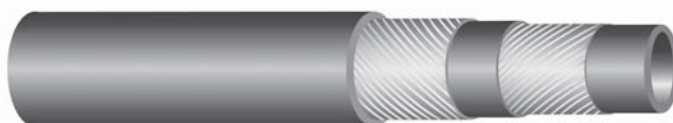

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1447521	5	11/61	10,5	0,41	10	150	30	450	0,08	0,05	30	1,2	100	328
1447530	8	5/16	15	0,59	10	150	30	450	0,15	0,10	50	2,0	100	328
1447548	10	25/64	17	0,67	10	150	30	450	0,17	0,11	60	2,4	100	328
1447556	12	15/32	17	0,67	10	150	30	450	0,13	0,09	70	2,8	100	328
1447564	13	1/2	19	0,75	10	150	30	450	0,18	0,12	80	3,2	100	328
1447572	15	19/32	23	0,91	10	150	30	450	0,28	0,19	90	3,5	60	200
1447580	16	5/8	23	0,91	10	150	30	450	0,25	0,17	100	3,9	60	200
1447661	19	3/4	26	1,02	10	150	30	450	0,31	0,21	110	4,3	60	200


**IT**

**Applicazione:** mandata di acqua calda, leggermente acidula e/o liquidi non aggressivi per industrie chimiche.

**Temperatura:** da -30°C a +120°.

**Costruzione**

**Sottostrato:** nero, liscio in gomma sintetica.

**Rinforzo:** inserti tessili ad alta tenacità.

**Copertura:** nera, liscia in gomma sintetica resistente agli agenti atmosferici e all'invecchiamento.

**Marcatura:** IVG RUBBER HOSE MULTIFORM BLACK 10 BAR W.P. TEMP. 120°C (+248°F) SIZE - BATCH NUMBER.

**EN**

**Application:** designed to convey hot water, fluids even slightly acidic and non aggressive in chemical industries.

**Temperature:** from -30°C (-22°F) to +120°C (+248°F).

**Construction**

**Tube:** black, seamless synthetic rubber compound.

**Reinforcement:** high strength synthetic fabrics.

**Cover:** designed to convey hot water, fluids even slightly acidic and non aggressive in chemical industries.

**Branding:** IVG RUBBER HOSE MULTIFORM BLACK 10 BAR W.P. TEMP. 110°C (+230°F) SIZE - BATCH NUMBER.

