




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1448269	6	17/72	14	0,55	20	300	60	900	0,16	0,11	60	2,4	100	328
1448277	8	5/16	17	0,67	20	300	60	900	0,23	0,15	65	2,6	100	328
1448285	10	25/64	19	0,75	20	300	60	900	0,27	0,18	80	3,2	100	328

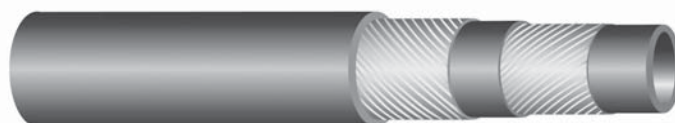

IT

**Applicazione:** adatto per mandata di carburanti, o per lubrificazione ed ingrassaggio nei più vari servizi.

**Temperatura:** da -20 °C a +60 °C.

**Costruzione**

**Sottostrato:** nero, liscio in gomma NBR, conduttivo, resistente ad olii e carburanti con contenuto di aromatici fino al 50%.

**Rinforzo:** inserti tessili ad alta tenacità.

**Copertura:** nera, liscia in gomma PVC/NBR, resistente ai carburanti, agli olii e agli agenti atmosferici.

**Marcatura:** IVG RUBBER HOSE CARBUR 20 BAR W.P. - SIZE - 50 % Aromatico - BATCH NUMBER.

EN

**Application:** suitable for delivery of fuels, or for lubrication and greasing in different services.

**Temperature:** from -20 °C (-4 °F) to +60 °C (+140 °F).

**Construction**

**Tube:** black, seamless NBR conductive rubber, suitable to convey fuel and oils with aromatic content up to 50%.

**Reinforcement:** high strength synthetic fabrics.

**Cover:** black, seamless PVC/NBR rubber, resistant to fuel, oil, and weathering.

**Branding:** IVG RUBBER HOSE CARBUR 20 BAR W.P. - SIZE - 50 % Aromatico - BATCH NUMBER.

