


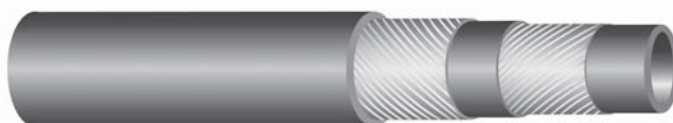

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1446517	6	17/72	13	0,51	10	150	30	450	0,13	0,09	50	2,0	100	328
1446460	7,5	13/44	13,5	0,53	10	150	30	450	0,12	0,08	60	2,4	100	328
1446533	7,5	13/44	14,5	0,57	10	150	30	450	0,15	0,10	60	2,4	100	328
1446452	8	5/16	14	0,55	10	150	30	450	0,13	0,09	65	2,6	100	328
1446525	8	5/16	15	0,59	10	150	30	450	0,16	0,11	65	2,6	100	328
1446657	10	25/64	16	0,63	10	150	30	450	0,15	0,10	80	3,2	100	328


IT

Applicazione: adatto per mandata di benzina senza piombo, carburanti, o per lubrificazione ed ingrassaggio nei più vari servizi.

Temperatura: da -20°C a +90°C.

Costruzione

Sottostrato: nero, liscio in gomma NBR, conduttivo, resistente alla benzina senza piombo e agli aromatici fino al 50%.

Rinforzo: inserti tessili ad alta tenacità.

Copertura: nera, liscia in gomma PVC/NBR, resistente ai carburanti, agli olii ed agli agenti atmosferici.

Marcatura: IVG RUBBER HOSE GREEN CARBUR 10 BAR W.P. - SIZE - 50 % Aromatico - BATCH NUMBER.

EN

Application: suitable for delivery of all types of gasoline, or for lubrication and greasing in different services.

Temperature: from -30 °C (-22 °F) to +90 °C (+194 °F).

Construction

Tube: black, seamless NBR conductive rubber, suitable to convey all types of gasoline included unleaded gasoline and oils with aromatic content up to 50%.

Reinforcement: high strength synthetic fabrics.

Cover: black, seamless PVC/NBR rubber, resistant to fuel, oil, and ozone.

Branding: IVG RUBBER HOSE GREEN CARBUR 10 BAR W.P. - SIZE - 50 % Aromatico - BATCH NUMBER.

