


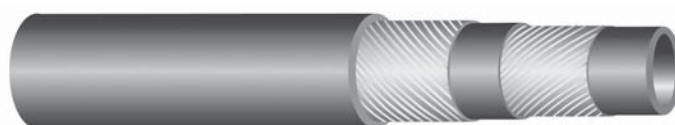

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1446665	8	5/16	15,5	0,61	20	300	60	900	0,20	0,13	55	2,2	100	328
1446673	10	25/64	17,5	0,69	20	300	60	900	0,30	0,20	65	2,6	100	328
1446681	13	1/2	21	0,83	20	300	60	900	0,30	0,20	90	3,5	60	200
1446690	16	5/8	24	0,95	20	300	60	900	0,35	0,24	110	4,3	60	200
1446703	19	3/4	29	1,14	20	300	60	900	0,53	0,36	140	5,5	40	131
1446711	25	1	36	1,42	20	300	60	900	0,72	0,48	160	6,3	40	131


**IT**

**Applicazione:** tubo multiuso, adatto per convogliare aria compressa acqua, carburanti, grassi e olii minerali.

**Temperatura:** da -30 °C a +100 °C.

**Costruzione**

**Sottostrato:** nero, liscio in gomma PVC/NBR conduttiva resistente a prodotti petroliferi fino al 50% di contenuto aromatico.

**Rinforzo:** inserti tessili ad alta tenacità.

**Copertura:** rossa, liscia in gomma PVC/NBR resistente all'olio e agenti atmosferici.

**Marcatura:** IVG RUBBER HOSE MULTIVERSAL RED - SIZE - 20 BAR W.P. - BATCH NUMBER.

**EN**

**Application:** multipurpose hose suitable for fuels, greases, mineral oils, compressed air and water.

**Temperature:** from -30 °C (-22 °F) to +100 °C (+212 °F).

**Construction**

**Tube:** black, seamless PVC/NBR antistatic rubber compound, resistant to petroleum products with aromatic content up to 50%.

**Reinforcement:** high strength synthetic fabrics.

**Cover:** red, seamless, PVC/NBR rubber compound, mineral oils and weather-resistant.

**Branding:** IVG RUBBER HOSE MULTIVERSAL RED - SIZE - 20 BAR W.P. - BATCH NUMBER.